



C0235T - Lincat Convector Touch Electric Counter-top Convection Oven - W 810 mm - D 850 mm - 4.8 kW

Able to roast, braise, bake and reheat, a C0235T Convector convection oven is a powerful addition to any commercial kitchen.

- ✓ 3 x GN1/1 capacity
- ✓ Touchscreen control with easy-to-use icon-driven menu selections
- ✓ Easy-view traffic light status - see the status of the oven at a glance, even in the noisiest kitchens
- ✓ Space for 24 programs with up to four stages, which can be adjusted individually
- ✓ Up to four-stage phased cooking for perfect results - set temperature, time, fan speed and humidity injection for each stage
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Five levels of humidity injection
- ✓ Nine-hour on-screen timer, with electronic buzzer, and flashing oven lamps to indicate that cycle has finished

Specifications

Summary		Power and Performance	
Brand	Lincat	Total Power kW	4.8
Range	Convector	Temperature Range °C	30-260
Series	Touch	IP Rating	IP23
Power Type	Electric	Controls Position	Right hand side
Unit Type	Counter-top	Temperature Control	Electronic
Available in UK Only	No	Timer Range mins	1-540
UK Warranty	2 Years Parts and Labour Warranty	Oven Rating kW	4.6
Export Warranty	Contact your local dealer		
GTIN	5056105118299		

Key Specifications **Capacity**

Stackable	Yes (with optional kit)
Feet Height/Type	55mm/adjustable
Continuous Plug-In Door Seal	Yes
Removable Inner Door Glass	Yes
Handle Type	Grab
Vented Door	Yes
Reversible Door	No
Door Type	Drop down
Number of Cooking Phases	4
Phased Cooking	Yes
Shelf Timer(s) (Number)	Yes(4)
Grill Element/Mode	No
Core Temp Probe	No
Steam Injection	Yes
Fan(s) Speed	2
Fan(s) Type	Bi-Directional
Number of Fan(s)	1
Euronorm Compatible	Yes
Sheet Pan Compatible	Yes
Removeable Shelf Guides	Yes
Manual Mode	Yes
Programmable	Yes
Number of Programs	24 (4 stages)
Timer Type	Touchscreen
Display Type	Touchscreen
Number of Shelves included	3
Number of Shelf Positions	3
Type of Lighting	Halogen Bulb
Construction/Finish	304 S/S cavity
GN Compatible	Yes

Gastronorm Capacity	3 x GN1/1
Euronorm Capacity	3 x 600 mm x 400 mm
Shelf Spacing mm	90
Sheet Pan Capacity	3 x 660 mm x 460 mm
Capacity Litres	96.0

Weights and Dimensions **Supply Connections**

Unit Height (External) mm	645
Unit Width (External) mm	810
Unit Depth (External) mm	850
Height (Internal) mm	308
Width (Internal) mm	690
Depth (Internal) mm	470
Shelf Dimensions Width mm	660
Shelf Dimensions Depth mm	425
Net Weight Kg	82

Requires Installation	Yes
Requires Electrical Supply	Yes
UK 3 Pin Plug	No
Requires Hardwiring	Yes
Electrical Supply Rating Watts	4,800
Single Phase Amps	20.5
Single Phase Voltage	230
Three Phase Amps	L1=6.9; L2=6.9; L3=6.9
Three Phase Voltage	400
Water Connection Pressure Bar	2.0-6.0
Drain Connection	No
Water Connection	3/4" BSPT
USB Port	Yes




Shipping

Packed Weight Kg	90.2
Packed Height cm	81.8
Packed Width cm	88
Packed Depth cm	100

Available Accessories

ACIK04	Water Treatment Filter Kit
CO200/FS	Lincat Convector Floor Stand for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 4 Runners - W 810 mm
CO200/LFSK	Lincat Convector Low Floor Stand and Stacking Kit for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 1 Runner - W 810 mm

Technical Picture

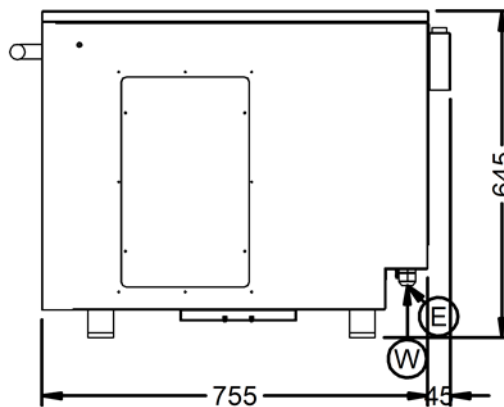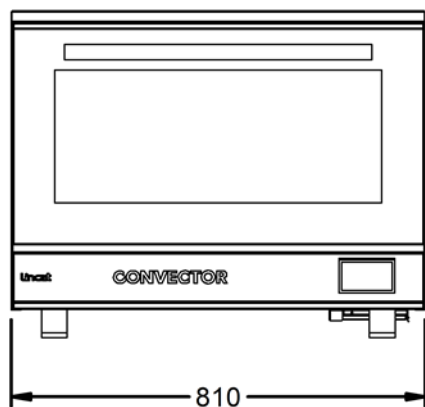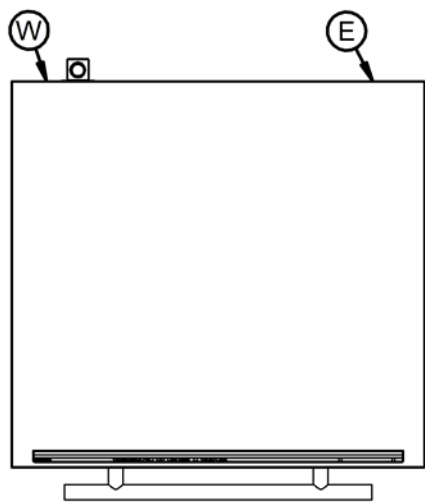

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm